



**Lead Set 140 Amp
 240/415 Volt
 Single / Three Phase**

ELECTRICAL

Max. Load per Conductor	140 Amps (AS 3008.1.1 - 2009 Table 8)
Voltage Rating	600/1000 Volts AC
Nominal Frequency	50 Hz

POWER OUTLETS


Conductor Size A Phase	35 mm ² SDI Flexible X-90 0.6/1 kV
Conductor Size B Phase	35 mm ² SDI Flexible X-90 0.6/1 kV
Conductor Size C Phase	35 mm ² SDI Flexible X-90 0.6/1 kV
Conductor Size Neutral	35 mm ² SDI Flexible X-90 0.6/1 kV
Conductor Size Earth	10 mm ² SI Flexible V-90HT 0.6/1 kV

DIMENSIONS AND WEIGHT

Overall Length	25 metres
Weight	45 Kg (Approx.)

ACCESSORIES

Cable Covers
 Safety Bollards

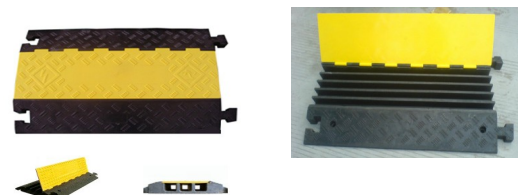

JDC-Thomson Generators offer an extensive modern fleet of portable and mobile generators designed to meet the rigorous demands of modern industry.

All of our units are maintained by specialist in-house generator technicians, guaranteeing the highest level of reliability and safety.

An onsite connection and disconnection service by our qualified technicians is also available along with professional advice on sizing and suitability for the application if required.

Customers can collect their rental unit from our workshop or we can arrange delivery to site.