

Lead Set 370 Amp 240/415 Volt Single / Three Phase

ELECTRICAL

Max. Load per Conductor	370 Amps (AS 3008.1.1 - 2009 Table 8)
Voltage Rating	600/1000 Volts AC
Nominal Frequency	50 Hz

POWER OUTLETS


Conductor Size A Phase	150 mm ² SDI Flexible R-E-110 0.6/1 kV
Conductor Size B Phase	150 mm ² SDI Flexible R-E-110 0.6/1 kV
Conductor Size C Phase	150 mm ² SDI Flexible R-E-110 0.6/1 kV
Conductor Size Neutral	150 mm ² SDI Flexible R-E-110 0.6/1 kV
Conductor Size Earth	50 mm ² SI Flexible V-90HT 0.6/1 kV

DIMMENSIONS AND WEIGHT

Overall Length	25 metres
Weight	162 Kg (Approx.)

ACCESSORIES

Cable Covers
Safety Bollards

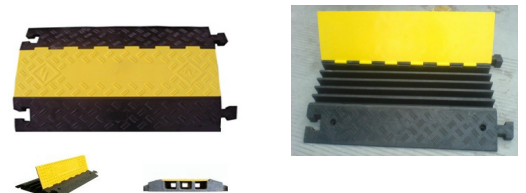

JDC-Thomson Generators offer an extensive modern fleet of portable and mobile generators designed to meet the rigorous demands of modern industry.

All of our units are maintained by specialist in-house generator technicians, guaranteeing the highest level of reliability and safety.

An onsite connection and disconnection service by our qualified technicians is also available along with professional advice on sizing and suitability for the application if required.

Customers can collect their rental unit from our workshop or we can arrange delivery to site.